
OP HALF CELLS

INKER & MASOR

REFERENCE ELECTRODES

HALF CELLS

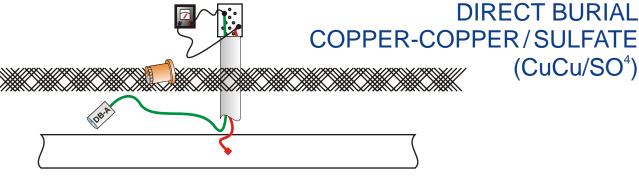

Model DB-A Copper-Copper/Sulfate Reference Electrode designed for direct burial for long term monitoring of buried or earth contacting structures.

Large surface area of exposed copper-sulfate mixture

Long life - 10+ years

Use with rapid-wetting backfill

Encapsulate fill area for permanent

water seal of wire connection

Rugged construction

Body made of PVC/ABS


SILVER - SILVER/CHLORIDE

(AgAg/CI)

MODEL SC-4

The Model SC-4 Silver-Silver/Chloride kit comes complete with everything necessary to conduct field tests both ON SHORE and OFF SHORE.

Distributed by



SC-4 Silver-Silver/Chloride Reference electrode kit.

Reference Cell body for LAND Reference Cell body for SEA Brass Weight Waterproof connection Silver element "Ocean Water" Carrying case

www.teststations.com

www.detectron.com



www.tinker-rasor.com

Info@tinker-rasor.com



Tinker & Rasor quality is found in our products, our people and our customer service.



TINKER & RASOR

CORROSION MITIGATION INSTRUMENTATION

PRODUCT DATA SHEET

MODEL DB-A

Features:

- Rugged body
- Large copper-sulfate surface area
- Long life (10+ years)

Construction:

Tough PVC/ABS body with proprietary solid copper-sulfate mixture, and pure copper rod.

Applications:

Under ground without chloride (<500 PPM) or fresh water or sea water contamination.

Recommendations:

Best Results with rapid wetting backfill, such as bentonite to ensure a moist environment for the reference electrode.

Environment:

Low Freezing Point and high boiling point makes rugged product in most environments.

Specifications:

Copper-Copper/Sulfate reference electrode.

Tip:

Proprietary, non-tip electrode, with direct exposure of copper sulfate mixture to backfill/soil.

Dimensions:

2.875" diameter, 4.88" long, weight 32 Oz (0.896 Kgs)

MODEL SC-4

Features:

- (2) Body types for use on LAND and SEA
- Waterproof connector
- Pure silver element
- Carrying case

Construction:

Strong plastic body, with a brass weight for SEA use. Waterproof connector with stainless steel wire strain relief, for pulling cell up from great depths.

Applications:

- Offshore structures
- Land based structures

Specifications:

- Silver-Silver/Chloride reference electrode (AgAg/Cl)
- 99.999% Pure Silver

Dimensions:

KIT: 12" x 6.75" x 4.5", 2 lbs.

(305mm x 171mm x 114mm, 0.908Kg)

SHIPPING: 13" x 7.5" x 5", 4 lbs.

(330mm x 191mm x 127mm, 1.81Kg)

MODEL DB-A





MODEL SC-4 AgAg/CI kit

DELIVERY: Immediately from STOCK

F.O.B. San Bernardino, CA USA

SERVICE: 24-hour Turn-Around

TERMS: Net30 Days, on approval of credit

WARRANTY: 90 Days, parts and labor